Surge Protective Device



ACCESSORY SOLD SEPARATELY

The PMD2 series wall mount suppressor is designed to protect 120 volt electronics with up to 15 amps current carrying capability. PMD2 has outlets on the sides (90 degree angle from one another) to accommodate a variety of plugs.

The PMD2 features multistage suppression giving the benefits of lowest clamping voltage even at very high surge energy. The PM2D provides clean power by filtering out noise common to household power.

In the event of a catastrophic surge such as lightning, it completely disconnects AC power to connected equipment. The PMD2 series is UL listed to the latest edition 1449 standard.

| General Technical Specifications | |
|----------------------------------|-------------------------------------|
| Weight | 0.65 lb. |
| Dimensions | 3.25 in. W X 1.625 in. D X 5.25 in. |
| Voltage Protection Rating | L-N 400V, L-G 500V, N-G 400V |
| Thermal Fusing | Yes |
| Single Pulse Energy Dissipation | 1350 Joules |
| Response Time | <1 ns |
| Protection Modes | L-N, L-G, N-G |
| Peak Impulse Current | 60,000 A |
| Nominal Discharge Current | 3,000 A |
| Maximum Current Rating | 15A (1800 W) |
| Line Voltage | 120 VAC, 50/60 Hz |
| Initial Clamping Level | 200V |
| EMI/RFI Noise Filtration | 50 dB (100 kHz - 1 MHz) |
| Catastrophic Surge Circuit | Yes |
| Certifications | UL 1449 Rating |

Technical Documentation

Key Specs

- EMI/RFI Filtration Circuitry for Clean, Unimpeded Power.
- Convenient display feature; turn cover around to hide diagnostic lights.
- Thin Profile Only 1.5 inches deep.

Features

- 120 Volt General Use
- Twin Receptacle
- Simple Plug-In Installation
- Available with telephone protection or video protection
- Multistage protection


Certifications

UL 1449 Rating

^{*}See Ordering Information for model number selection

Installation Instructions

DRAWING 1




Ordering Information

| MODEL | ALL MODELS ARE 120 VOLT SINGLE CIRCUIT. |
|---------|---|
| PMD2 | Twin Receptacle |
| PMD2-C | Combo with video protection |
| PMD2-TL | Combo with Telephone protection |
| PMD2-AV | 3 Circuits RCA Input/Outputs |
| PMD2-DF | Combo w/ loopwire protection |

PMD2-DF

DRAWING 2

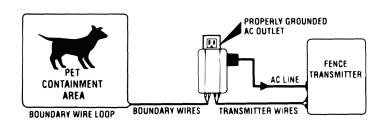



PEMCO 11400 47th St Ste A Clearwater, FL 33762 Phone: (800) 800-0966 www.pemfg.com



